



LEGEND
BLW=5HP DIRECT DRIVE PADDLE WHEEL BLOWER 1550 CFM @ 6" S.P.
CLS=COMMERCIAL DUTY DOOR CLOSER DIS=NON-FUSED DISCONNECT SWITCH FOR CONTROL PANEL
EMO=EMERGENCY STOP SWITCH
DR1=CLEAR ANODIZED ALUMINUM FRAME DOOR (ENTRY END)
DR2=CLEAR ANODIZED ALUMINUM FRAME DOOR (EXIT END)
FL1=99.99% @ .3 MICRON HEPA FILTER
FLX=8" DIAMETER FLEX CONNECTION FOR RETURN AIR
GLS=0.25" THICK CLEAR TEMPERED GLASS GRI =RETURN AIR GRILLE
HNG=4.5" NICKEL PLATED BUTT HINGE
I GT=LED LIGHT FIXTURE
MOT=5HP DIRECT DRIVE OPEN DRIP PROOF MOTOR 3500 RPM
NOZ=0.875" DIAMETER WHITE PLASTIC AIR NOZZLE (90 IN WALLS & 12 IN CEILING)
PL1=HEPA FILTER PLENUM 0.60" THICK ALUMINUM CONSTRUCTION
PL2=RETURN AIR PLENUM 0.60" THICK ALUMINUM CONSTRUCTION
PNL=NEMA 1 ENLOSURE CONTROL PANEL PRE=MERV 7 PANEL FILTER
SI V=SI FEVED PENETRATION THROUGH ROOF FOR INSTALLTION OF SPRINKER
STP=PEMKO #285CPK DOOR SEALS
SWP=PEMKO #307AV DOOR SWEEP



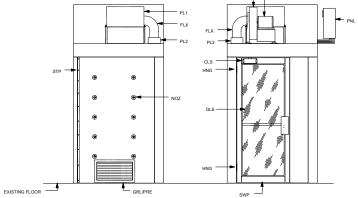

Notes:

- The control panel is recessed in mechanical wall on entry side of air shower.
 The air shower is shipped knock down into (8) walls, (2) roofs and (2) doors.
 The air shower is supplied with a sleeved penetration through the roof section for installation of a sprinkler head. Sprinkler is by others.
 The air shower does not come with a floor. It uses the existing floor.



PO Box 427 Rancho Cucamonga, CA 91729-0427 Voice: (800) 913-0054 Fax: (909) 483-1801

Drw# TN60144RA	Title: MODEL "TN" AIR SHOWER	
Sheet:	Project:	Date: